

Md. Mahfuzul Islam Rizve

From: Mohammad Shorhab Uddin [shorhab988@yahoo.com]
Sent: Sunday, May 13, 2018 11:52 AM
To: Md. Mahfuzul Islam Rizve
Cc: jewel.dmk@gmail.com; masud4s@yahoo.com
Subject: Re: Installation Materials BOQ for Your 150 kVA DG.
Attachments: image001.png

Dear Mr. Rizve,

Thanks for sent BOQ which will require before erection of DG.

we have accepted your BOQ price offer excluding exhaust system materials.

So, please ensure the your mentioning BOQ materials during delivery of 150 KVA DG except exhaust system materials.

Thanks & Regards

Md. Shorhab uddin

On Sunday, May 13, 2018, 11:16:43 AM GMT+6, Md. Mahfuzul Islam Rizve <mahfuz@cross-world.com> wrote:


Dear Shorhab Vai,


Mahfuz
13/05/18

Please see the attached file for your 150 kVA DG Installation Materials, Please give me a approved mail as per attached BOQ price as early as possible, we will try to provide our best support for complete the installation work.

Best regards,

Md. Mahfuzul Islam Rizve | **CROSS WORLD GROUP** | Engineer (Grade-1), Sales | Plot 1/B, Road 90, Gulshan - 2, Dhaka 1212, Bangladesh | Phone: +880 2 5881 1858, 989 1442 | Mobile No: **01755-694131, 01712940082** | Fax: +880 2 5881 5160 | E-mail: mahfuz@cross-world.com | web: www.cross-world.com

 please consider the environment before printing this email

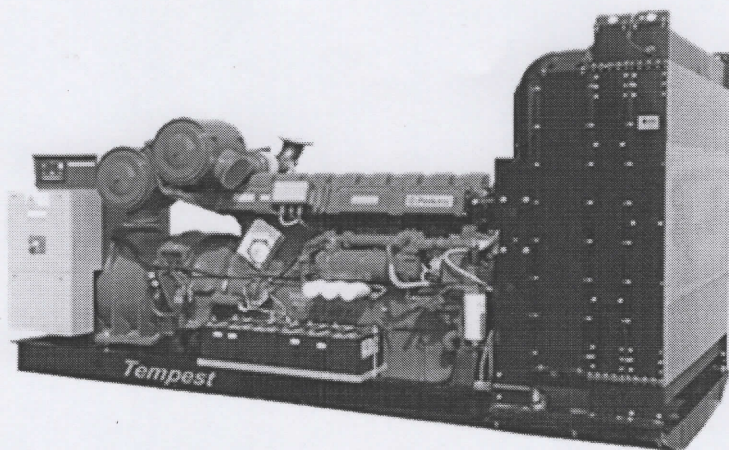

CROSS WORLD POWER LIMITED
BOQ OF 1X150 KVA GENERATOR INSTALLATION MATERIAL

CLIENT - MASUD STEEL DESIGN BD		ADDRESS- GAZIPUR		DATE- 30.04.2018				
GEN MODEL-		ENGINE MODEL-		ALTERNATOR MODEL-				
SL NO	JOB DESCRIPTION	TECHNICAL DETAILS/ BRAND	SCOPE OF SUPPLY	UOM	QTY	UNIT RATE	TOTAL RATE	REMARKS
1	Electrical System:							
1.2	Power Cable Lugs	95 rm , Material -Copper , Surface-Electro Tinned		Pcs	10	62	620	
1.3	Control cable For Sensing	4 X 1.2 rm (40/0.19 mm)Flexible Cable		Meter (apprx.)	19	85	1,615	
1.4	PVC Flexible Pipe	2.5" dia		Meter (apprx.)	8	94	755	
1.5	Saddle	2.5" dia local		Pcs	10	8	80	
1.6	Royal Plug & Screw	10 No.		Pack	1	178	178	
4	Cooling System:						-	
4.1	Radiator Ducting	As per layout with 22 SWG MS sheet,Angle bar, flat bar support,Canvas cloth, iron net mesh etc		Sq-ft (apprx.)	30	274	8,220	** Necessay punch for duction & net grille installation work will done by client
5	Commissioning Material:						-	
5.1	Radiator coolant	Havoline Premix Coolant		Liter	25	89	2,225	
5.2	Lube oil	SAE 15 W 40			20	450	9,000	
5.3	Battery electrolyte	Specific gravity 1.250			10	68	680	
7	Rubber Pad						-	
7.1	Rubber Pad for DG	LXW-- 300mm X 300mm, Thickness-- 25mm		Pcs	4	1,200	4,800	
Total TK-							28,173	

mahe
13/05/18

Approved
(attached mail)