

FINANCIAL OFFER

ABA Group
Sena Kalyan Commercial Complex, Plot # 09,
Block # F, Tongi, Gazipur
Project : Hilsha

DATE : Mar 03, 2021
REF : CWPL-AM/0571/21-R02F

FINANCIAL OFFER FOR SUPPLY OF 350 KVA 3 PHASE HEAVY DUTY DIESEL GENERATING SETS.

Dear Sir,

We are pleased to submit our financial offer with reference to our technical offer# CWPL-AM/0571/21-R02T dated Mar 03, 2021 :

1. Price:

SL #	Product Name	Unit	Price (BDT)	Qty.	Total Price(BDT)
1)	TEMPEST Brand 350 KVA (Prime) Rating Diesel Generator with Perkins engine and Stamford alternator BRAND : Tempest ENGINE : Perkins, UK / USA ALTERNATOR : Stamford, UK CONTROL MODULE : Deepsea, UK PORT OF SHIPMENT : Felixstowe port, UK AVAILABILITY : 5 to 15 days from ready stock subject to availability	Set	3,600,000.00	1.00	3,600,000.00
2)	Local Canopy for 350 KVA Genset	Pcs.	350,000.00	1.00	350,000.00
3)	Installation & Commissioning Materials (As per Attached BOQ)	Lot	200,000.00	1.00	200,000.00


Total Price (Ready Stock) in BDT 4,150,000.00

Special Discount (150,000.00)

GRAND TOTAL (Excluding VAT & AIT) in BDT 4,000,000.00

Amount in words : BDT Four Million Only.

* Payment : Advance (50%) = 2,000,000 Tk
After Commissioning (50%) = 2,000,000 Tk

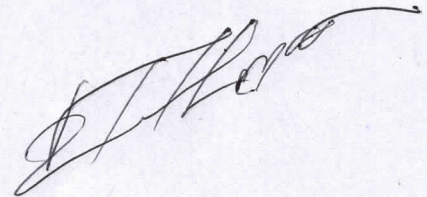

CLIENT -		ADDRESS-		DATE-		
GEN MODEL-		ENGINE MODEL-		ALTERNATOR MODEL-		
SL NO	JOB DESCRIPTION	TECHNICAL DETAILS/ BRAND	SCOPE OF SUPPLY	UOM	QTY	REMARKS
1	Electrical System:					
1.1	Power Cable (35 °C Ambient on air)	4X1C-300 rm NYY DG to Changeover/ATS 4X1C-300 rm NYY MAINS to Changeover/ATS 4X1C-300 rm NYY Changeover/ATS TO LOAD	Client	Meter	-	Client will arrange
1.2	Power Cable Lugs	300 rm Material -Copper , Surface-Electro Tinned		Meter	-	
1.3	Control cable For Sensing	2X 1.2 rm (40/0.19 mm) Flexible Cable		Meter	25	
1.4	PVC Flexible Pipe	1" Dia		Meter	25	Consedering 25 meter ✖
1.5	PVC Tape	Adhesive Tape 04 color (Red/Yellow/Black/Blue)		Pcs	8	
1.6	PIB Tape			Pcs	1	
1.7	Royal Bolt	10 no.		Pcs	10	
1.8	Cable Tie	L - 10"		Pack	5	
1.9	Cable Laying	Cable laying and termination system		Meter	✖ 100	Consedering 100 meter ✖
2	Earthing System					
2.1	Earthing Boring	2nos, 100ft each		Job	2	
2.2	GI Pipe (Boring)	38.1mm Dia G.I. Pipe with accessories		Meter	14	
2.3	Earthing Copper Lead (Boring)	Installation of solid cooper wire earthing lead 2 SWG in 38.1 mm dia GI pipe & termination of connection at both end		Meter	60	
	Earthing Copper Lead (Termination)	Installation of solid cooper wire earthing lead 2 SWG in 38.1 mm dia GI pipe & termination of connection at both end		Meter	1	
2.4	Earthing Block	Dimension LXWXD - 250mm X 40mm X 5mm with connection facility		Nos.	2	
2.5	Earthing Cable	1 X 50rm BYA (Green) from Earting Copper bar to gen & equipment	Client	Meter	-	Client will arrange Refer
2.6	Earth cable lugs	50rm Material -Copper , Surface-Electro Tinned		Nos.	8	
3	Exhaust System:					
3.1	Exhaust Silencer straight Pipe	MS Pipe bore 6", thickness 3-4mm		Meter	6	Consedering 6 meter/20 ✖ feet
3.2	Exhaust Bends /Elbow	Long radius 90 deg L bow 8" bore		Pcs	2	
3.3	Exhaust Bends / Elbow with Flange	Welding neck flange 6" dia		Pcs	3	
3.4	Exhaust Heat Insulation (excluding 1nos. Residential silencer box)	Insulation Of Pipe with Rockwool (50mm thickness) along with 26SWG GP sheet jacketing		Job	1	
3.5	Exhasut Fitting (excluding 1nos. Residential silencer box)	All bracket , support must be made with MS angle 50X50X 4, 5 & 6 MM		Job	1	
5	Commissioning Material:					
5.1	Radiator coolant	Havoline Premix Coolent		Liter	60	
5.2	Lube oil	SAE 15 W 40		Liter	40	
5.3	Battery electrolyte	Specific gravity 1.250		Liter	20	
5.4	Fuel	Diesel For Test Run		Liter	300	
7	DG On site delivery:					
7.1	Loading /Unloading/Lifting	Generator dry weight-4200 Kg		Job	1	Free of Cost - Ground Floor
7	CIVIL WORK:					
7.1	DG Foundation	DG RCC Foundation LXWXD-	Client	Job	1	Client will arrange
TOTAL TK (Excl. VAT & AIT):-				200,000.00		
Note:						