

From: Purchase - Adamma Goheen <goheen@citygroupbd.com>
Sent: Tuesday, October 26, 2021 4:57 PM
To: 'Mizanur Rahman'
Cc: reajul@cross-world.com; habib@cross-world.com; Harunor Rashid; Planning & Business Development - DGM - Nahidul Islam; Construction - Dulal; Purchase - DGM - Tauhid Chowdhury; Purchase - Azam
Subject: RE: BOQ materials for 100 kva DG installation of Santi Nagor project.
Attachments: Revised 2 BOQ materials for 100 KVA of Santi Nagar Project..pdf

Dear Mizan Bhai,

Please proceed with the working as per your attached offer. As per the instruction from our honorable Head of Department the final work order value will be **tk. 50,000**. We will provide you the official Purchase order shortly but in the mean time we will request you to consider this mail as approval and proceed with necessary workings.

Thank you for your kind cooperation,

Best regards,

Adamma Goheen Reza

Executive- Procurement Department

City House | Plot No. NW (J) 9/B | Road No. 51, Gulshan-2| Dhaka 1212| Bangladesh

Tel +880 2 9852364-66 | IP 1463 | Mob +88 01679703769 & +88 01313427784

Email: goheen@citygroupbd.com

www.citygroup.com.bd



Please consider the environment before printing this e-mail

From: Mizanur Rahman [<mailto:mizanur@cross-world.com>]
Sent: Tuesday, October 26, 2021 4:45 PM
To: Purchase - Adamma Goheen
Cc: reajul@cross-world.com; habib@cross-world.com; Harunor Rashid; Planning & Business Development - DGM - Nahidul Islam; Construction - Dulal; Purchase - DGM - Tauhid Chowdhury
Subject: BOQ materials for 100 kva DG installation of Santi Nagor project.


Dear sir,

Please see the attached file of the revised BOQ for 100 kva santinagor project.

Best regard,

Md. Mizanur Rahman | CROSS WORLD POWER LTD | Engineer- Project Sales | Plot 1/B, Road 90, Gulshan - 2, Dhaka 1212, Bangladesh | p: +880 2 5881 1858, 2222 91442 | f: +880 2 5881 5160 | m: +8801755-694121 | mizanur@cross-world.com | w: www.cross-world.com

please consider the environment before printing this email

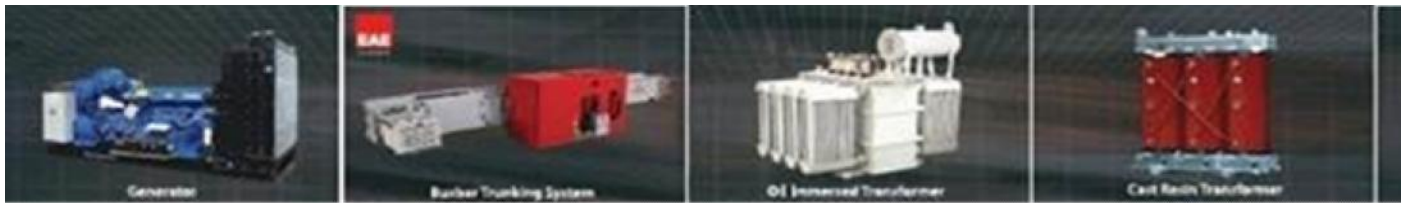

This communication contains information which is confidential and may also be privileged. It is for the exclusive use of the intended recipient(s).

From: Mizanur Rahman [<mailto:mizanur@cross-world.com>]

Sent: Sunday, October 24, 2021 12:04 PM

To: 'Purchase - Adamma Goheen'

Cc: tauhid@citygroupbd.com; 'Construction - Dulal'; 'Planning & Business Development - DGM - Nahidul Islam'; 'reajul@cross-world.com'; habib@cross-world.com; Harunor Rashid (harunor@cross-world.com)

Subject: BOQ materials for 100 kva DG installation of Santi Nagor project.

Dear sir,

Please find the attached file of 100 kva DG Installation materials for the Santi Nagor project.

If you need any kind of assistance please feel to contact us.

Best regard,

Md. Mizanur Rahman | CROSS WORLD POWER LTD | Engineer- Project Sales | Plot 1/B, Road 90, Gulshan - 2, Dhaka 1212, Bangladesh | p: +880 2 5881 1858, 2222 91442 | f: +880 2 5881 5160 | m: +8801755-694121 | mizanur@cross-world.com | w: www.cross-world.com

 please consider the environment before printing this email



This communication contains information which is confidential and may also be privileged. It is for the exclusive use of the intended recipient(s).

//This email contains confidential and/or privileged information. Any unauthorized copying, disclosure or distribution of the material in this email is strictly forbidden. Internet communications cannot be guaranteed to be timely, secure, error or virus-free. The sender does not accept liability for any errors or omissions.//

| CROSS WORLD POWER LIMITED | | | | | | | | |
|---|---|---|-----------------|-------|-----|------------------|------------|---------|
| BOQ OF 1X100kVA GENERATOR | | | | | | | | |
| CLIENT - City Group (Santi Nagar Project) | | | ADDRESS- Dhaka | | | DATE- 24/10/2021 | | |
| SL NO | JOB DESCRIPTION | TECHNICAL DETAILS/ BRAND | SCOPE OF SUPPLY | UOM | QTY | UNIT RATE | TOTAL RATE | REMARKS |
| 1 | Electrical System: | | | | | Client Scop | | |
| 2 | Generator Earthing : | | | | | Client Scop | | |
| 3 | Exhaust System: | | | | | - | - | |
| 3.1 | Exhaust Silencer straight Pipe | MS Pipe bore 3" ,thickness 3-4mm | | Meter | 6 | 1,956 | 11,928 | |
| 3.2 | Exhaust Bends /Elbow | Long radius 90 deg L bow 3" bore | | Pcs | 3 | 821 | 2,462 | |
| 3.3 | Exhaust Socket | welding neck flange 3"dia | | Pcs | 4 | 671 | 2,684 | |
| 3.4 | Exhaust Heat Insulation with silencer box | Insulation Of Pipe with Rockwool (25.4mm min thickness) along with 26SWG Aluminium sheet clading. | | Job | 1 | 2,983 | 2,983 | |
| 3.5 | Exhaust Fitting with silencer box | All bracket , support must be made with MS angle 50X50X 4 MM | | Job | 1 | 2,237 | 2,237 | |
| 4 | Cooling System: | | | | | Client Scop | | |
| 4.1 | Radiator Ducting | As per layout with 22 SWG MS sheet,Angle bar, flat bar support,Canvas cloth, iron net mesh etc. WXH- 2.5'X2' L- 12' | | Sq-ft | 108 | 297 | 32,069 | |
| 5 | Commissioning Material: | | | | | Client Scop | | |
| 6 | Loading/Unloading | Generator dry weight-2000kg. Need 300 feet rolling | | Job | 1 | - | - | |
| 8 | Civil works: | | | | | - | - | |
| 8.1 | Generator foundation | Dimension L X WxD - 10'9"X4'7"X3" ; CC with NCF | CLIENT | Job | 1 | - | - | |
| TOTAL TAKA(Excluding VAT & AIT) | | | | | | | 54,362 | |
| NOTE: All necessary civil work and diesel fuel will be arranged by client | | | | | | | | |

Approved amount:
50,000/-